

Screenbeam - LoopSign Deployment Guide

It's very easy to deploy LoopSign to your Screenbeam device!

You can run LoopSign in a frame or fullscreen.

Make sure you have the latest firmware for your device for LoopSign to work.

1. General settings

Log into the management web interface for your Screenbeam device.


(For more information check Screenbeam support pages)

Default username: Administrator

Password: screenbeam

2. Set LoopSign URL

- Enter "Digital Signage" menu on the device.

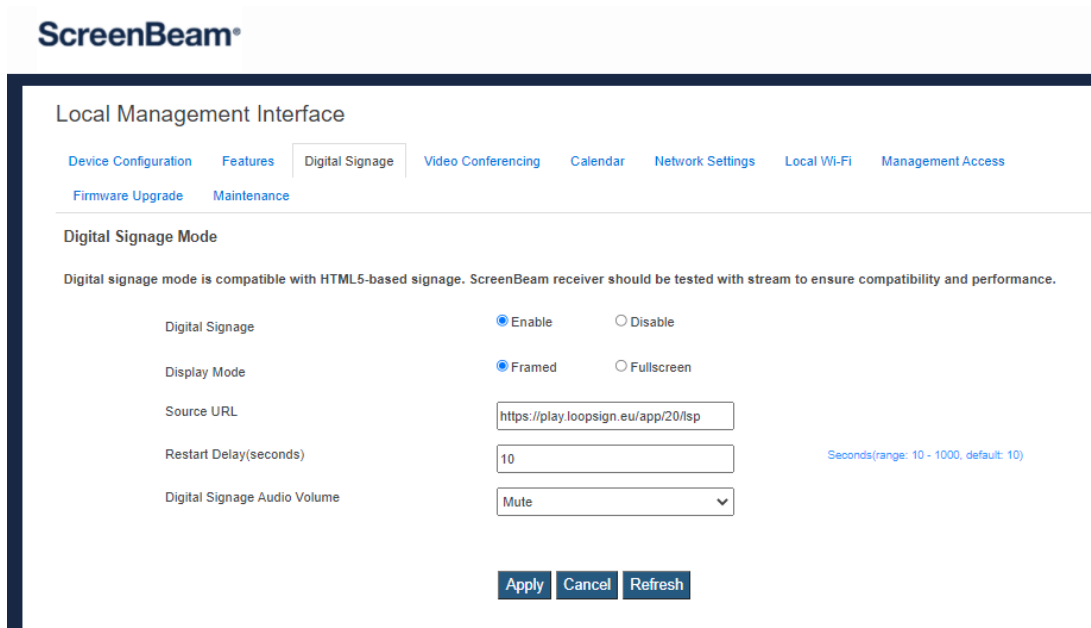

The screenshot shows the 'ScreenBeam' Local Management Interface. The 'Digital Signage' menu is selected. The configuration options are as follows:

Setting	Value
Digital Signage	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Display Mode	<input checked="" type="radio"/> Framed <input type="radio"/> Fullscreen
Source URL	<input type="text" value="https://play.loopsign.eu/app/20/lsp"/>
Restart Delay(seconds)	<input type="text" value="10"/> <small>Seconds(range: 10 - 1000, default: 10)</small>
Digital Signage Audio Volume	<input type="text" value="Mute"/>

Buttons:

- Enable Digital Signage
- Select desired display mode
- Set source URL with the screen URL from LoopSign
- Apply

That's it, you are ready to go!